

30.600 G

OEM Pressure Transmitter Low Cost

Applications

- ▶ mechanical and plant engineering
- ▶ general industrial applications

Characteristics

- ▶ ceramic sensor
- ▶ accuracy 1 % FSO according to IEC 60770
- ▶ nominal pressure ranges from 0 ... 1.6 bar up to 0 ... 250 bar



Technical Data




Input pressure range													
Nominal pressure gauge	[bar]	1.6	2.5	4	6	10	16	25	40	60	100	160	250
Overpressure	[bar]	5	5	12	12	20	50	50	120	120	200	400	400
Burst pressure ≥	[bar]	7	7,5	15	18	30	70	75	150	180	300	500	750
Vacuum resistance		unlimited											
Output signal / Supply													
Standard	2-wire:	4 ... 20 mA				/ V _S = 8 ... 32 V _{DC}							
Options	3-wire:	0 ... 10 V				/ V _S = 14 ... 30 V _{DC}							
	3-wire ratiometric:	10 ... 90% of V _S				/ V _S = 2.7 ... 5 V _{DC}							
Performance													
Accuracy ¹		≤ ± 1 % FSO											
Permissible load	2-wire:	R _{max} = [(V _S - V _{S,min}) / 0.02 A] Ω											
	3-wire:	R _{min} = 10 kΩ											
Influence effects	supply:	0.05 % FSO / 10 V											
	load:	0.05 % FSO / kΩ											
Response time	2-wire:	≤ 10 msec											
	3-wire:	≤ 3 msec											
Long term stability		≤ ± 0.3 % FSO / year at reference conditions											
Measuring rate		1 kHz											
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)													
Thermal effects (Offset and Span) / Permissible temperatures													
Thermal error		≤ ± 0.5 % FSO / 10 K (typ.)				in compensated range				-25 ... 85 °C			
Permissible temperatures		medium: -25 ... 125 °C				electronics / environment: -25 ... 85 °C				storage: -40 ... 85 °C			
Electrical protection													
Short-circuit protection		permanent				3-wire ratiometric: none							
Reverse polarity protection		no damage, but also no function											
Electromagnetic protection		emission and immunity according to EN 61326											
Mechanical stability													
Vibration		10 g, 25 Hz ... 2 kHz				according to DIN EN 60068-2-6							
Shock		500 g / 1 msec				according to DIN EN 60068-2-27							

Materials	
Pressure port / housing	stainless steel 1.4301 (304)
Seals (media wetted)	FKM others on request
Diaphragm	ceramics Al ₂ O ₃ 96 %
Media wetted parts	pressure port, seals, diaphragm
Miscellaneous	
Weight	approx. 120 g
Current consumption	2-wire: max. 25 mA 3-wire ratiometric: typ. 1.5 mA 3-wire voltage: max. 7 mA (short circuit current: max. 20 mA)
Operational life	> 100 x 10 ⁶ cycles
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) ²


² This directive is only valid for devices with maximum permissible overpressure > 200 bar

Wiring diagrams

2-wire-system (current)

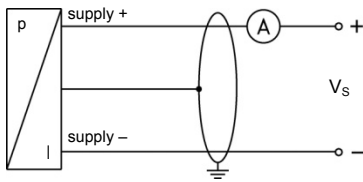

3-wire-system (voltage)

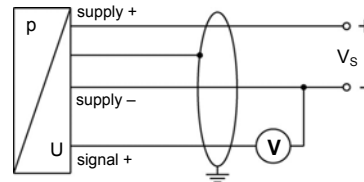

Pin configuration

Electrical connection	ISO 4400	Micro (contact distance 9.4 mm)	M12x1 (4-pin), plastic	cable colour (IEC 60757)
Supply +	1	1	1	wh (white)
Supply -	2	2	2	bn (brown)
Signal + (for 3-wire)	3	3	3	gn (green)
Shield	ground pin	ground pin	4	gnye (green-yellow)

Electrical connections (dimensions in mm)

³ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

⁴ different cable types and lengths available, permissible temperature depends on kind of cable

Mechanical connection (dimensions in mm)

© 2016 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code 30.600 G

30.600 G - - - - - - - 2 - - -

Input	[bar]																																							
	1.6	1	6	0	1																																			
	2.5	2	5	0	1																																			
	4.0	4	0	0	1																																			
	6.0	6	0	0	1																																			
	10	1	0	0	2																																			
	16	1	6	0	2																																			
	25	2	5	0	2																																			
	40	4	0	0	2																																			
	60	6	0	0	2																																			
	100	1	0	0	3																																			
	160	1	6	0	3																																			
	250	2	5	0	3																																			
customer																				9	9	9																	consult	
Pressure																																								
	gauge																			R																				
Output																																								
	4 ... 20 mA / 2-wire																			1																				
	0 ... 10 V / 3-wire																			3																				
	10 ... 90% of V_S / 3-wire ratiometric																			R																				
customer																				9																				consult
Accuracy																																								
	1.0 % FSO																			8																				
customer																				9																				consult
Electrical connection																																								
	Male and female plug ISO 4400																			1	0	0																		
	Male and female plug Micro																			C	1	0																		
	Male plug M12x1 (4-pin), plastic																			M	0	0																		
	Cable outlet with PVC cable ¹																			T	M	0																		
customer																				9	9	9																		consult
Mechanical connection																																								
	G1/4" DIN 3852																			3	0	0																		
	1/4" NPT																			N	4	0																		
customer																				9	9	9																		consult
Seal																																								
	FKM																			1																				
customer																				9																				consult
Special version																																								
	standard																				0	0	0																	
customer																					9	9	9																	consult

¹ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

© 2016 BD|SENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

