

26.600 G

OEM Pressure Transmitter Standard

Applications

- ▶ mechanical and plant engineering
- ▶ general industrial applications

Characteristics

- ▶ ceramic sensor
- ▶ accuracy 0.5 % FSO according to IEC 60770
- ▶ nominal pressure ranges from 0 ... 1 bar up to 0 ... 400 bar
- ▶ option: oil and grease free version



Technical Data

Input pressure range																	
Nominal pressure gauge [bar]	-1...0 ¹	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400		
Nominal pressure abs. [bar]	-	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400		
Overpressure [bar]	3	3	5	5	12	12	20	50	50	120	120	200	400	400	650		
Burst pressure ≥ [bar]	4	4	7	7,5	15	18	30	70	75	150	180	300	500	750	1000		
Vacuum resistance	unlimited																

¹ for this pressure range accuracy is ≤ 1 % FSO IEC 60770

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / V _S = 8 ... 32 V _{DC}
Options	3-wire: 0 ... 10 V / V _S = 14 ... 30 V _{DC}
	3-wire ratiometric: 10 ... 90% of V _S / V _S = 2.7 ... 5 V _{DC}

Performance	
Accuracy ²	≤ ± 0.5 % FSO for P _N -1...0 bar: ≤ 1 % FSO
Permissible load	2-wire: R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω 3-wire: R _{min} = 10 kΩ
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ
Response time	2-wire: ≤ 10 msec 3-wire: ≤ 3 msec
Long term stability	≤ ± 0.3 % FSO / year at reference conditions
Measuring rate	1 kHz

² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (Offset and Span) / Permissible temperatures	
Thermal error	≤ ± 0.3 % FSO / 10 K in compensated range: -25 ... 85 °C
Permissible temperatures	medium: -25 ... 125 °C electronics / environment: -25 ... 85 °C storage: -40 ... 85 °C

Electrical protection	
Short-circuit protection	permanent 3-wire ratiometric: none
Reverse polarity protection	no damage, but also no function
Electromagnetic protection	emission and immunity according to EN 61326

Mechanical stability	
Vibration	10 g, 25 Hz ... 2 kHz according to DIN EN 60068-2-6
Shock	500 g / 1 msec according to DIN EN 60068-2-27



Materials	
Pressure port / housing	stainless steel 1.4301 (304)
Seals (media wetted)	FKM others on request
Diaphragm	ceramics Al ₂ O ₃ 96 %
Media wetted parts	pressure port, seals, diaphragm
Miscellaneous	
Option oxygen application	for P _N ≤ 15 bar: O-ring in 70 EPDM 281 (with BAM-approval); permissible maximum values are 15 bar / 60° C and 10 bar / 90° C for P _N ≤ 25 bar: O-ring in FKM Vi 567 (with BAM-approval); permissible maximum values are 25 bar / 150° C
Weight	approx. 120 g
Current consumption	2-wire: max. 25 mA 3-wire ratiometric: typ. 1.5 mA 3-wire voltage: max. 7 mA (short circuit current: max. 20 mA)
Operational life	> 100 x 10 ⁶ cycles
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) ³

³ This directive is only valid for devices with maximum permissible overpressure > 200 bar


Wiring diagrams



Pin configuration

Electrical connection	ISO 4400	Micro (contact distance 9.4 mm)	M12x1 (4-pin), plastic	cable colour (IEC 60757)
Supply +	1	1	1	wh (white)
Supply -	2	2	2	bn (brown)
Signal + (for 3-wire)	3	3	3	gn (green)
Shield	ground pin	ground pin	4	gnye (green-yellow)

Electrical connections (dimensions in mm)

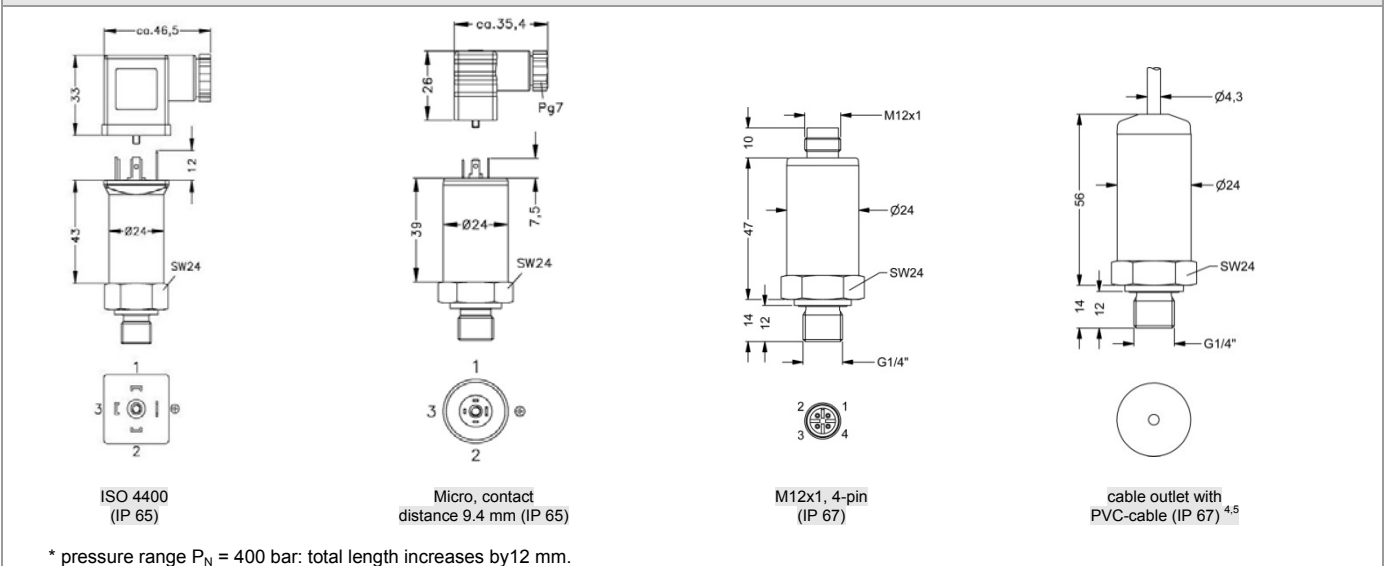


* pressure range P_N = 400 bar: total length increases by 12 mm.

⁴ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

⁵ different cable types and lengths available, permissible temperature depends on kind of cable

Mechanical connection (dimensions in mm)

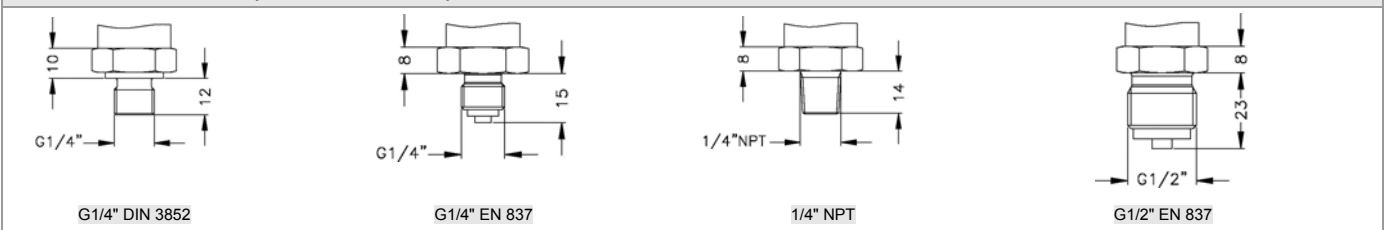

© 2016 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code 26.600 G

26.600 G - - - - - -

Input	[bar]																				
	1.0	1	0	0	1																
	1.6	1	6	0	1																
	2.5	2	5	0	1																
	4.0	4	0	0	1																
	6.0	6	0	0	1																
	10	1	0	0	2																
	16	1	6	0	2																
	25	2	5	0	2																
	40	4	0	0	2																
	60	6	0	0	2																
	100	1	0	0	3																
	160	1	6	0	3																
	250	2	5	0	3																
	400	4	0	0	3																
	-1 ... 0	X	1	0	2																
	customer	9	9	9	9																consult
Pressure																					
	gauge					R															
	absolute					A															
Output																					
	4 ... 20 mA / 2-wire					1															
	0 ... 10 V / 3-wire					3															
	10 ... 90% of V_S / 3-wire ratiometric					R															
	customer					9															consult
Accuracy																					
	0.5 % FSO					5															
	P_N : -1...0 bar					8															
	customer					9															consult
Electrical connection																					
	Male and female plug ISO 4400					1	0	0													
	Male and female plug Micro					C	1	0													
	Male plug M12x1 (4-pin), plastic					M	0	0													
	Cable outlet with PVC cable ¹					T	M	0													
	customer					9	9	9													consult
Mechanical connection																					
	G1/4" DIN 3852					3	0	0													
	G1/4" EN 837					4	0	0													
	1/4" NPT					N	4	0													
	G1/2" EN 837					2	0	0													
	customer					9	9	9													consult
Seal																					
	FKM					1															
	EPDM					3															
	customer					9															consult
Special version																					
	standard																				
	oxygen application ²												0	0	0						
	oil and grease free												0	0	8						
	customer												9	9	9						consult

¹ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

² oxygen application with FKM seal up to 25 bar or with EPDM seal up to 15 bar possible